


SPKR1202 Two Conductor Portable Speaker Cable

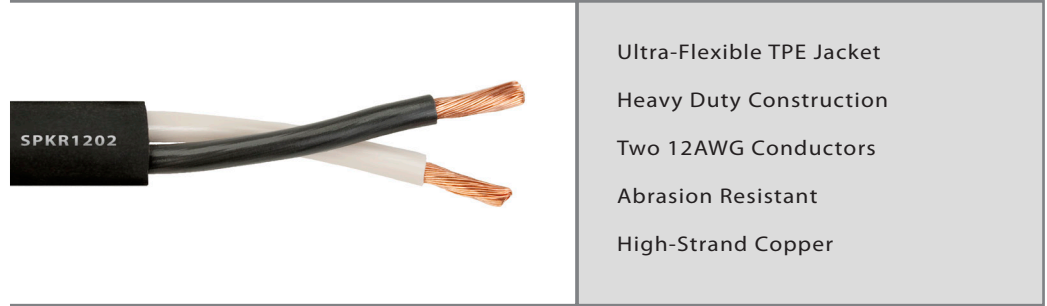

- Ultra-Flexible TPE Jacket
- Heavy Duty Construction
- Two 12AWG Conductors
- Abrasion Resistant
- High-Strand Copper


Part Number Overview

Part Number: **SPKR1202**

Description: Two Conductor 12AWG Portable Speaker Cable

Materials & Dimensions

CONDUCTORS	(2) 12AWG (65 x 30) Stranded BC
INSULATION	PVC .020" wall, (one black, one white)
JACKET	Ultra-Flexible TPE, .380" O.D.
COLOR	Black

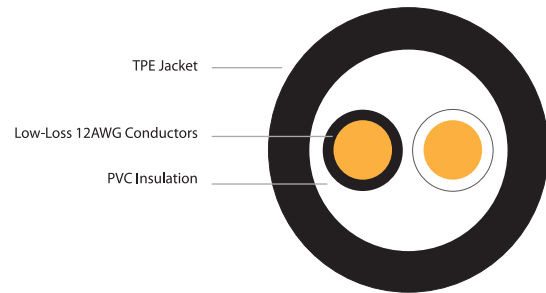

Performance Characteristics

DC Resistance	Temperature Range	Weight
Conductor: 1.6 Ω /Mft	-25°C to 60°C	90 lbs/Mft

SPKR1202 speaker cable has been designed for use in portable, studio and staging applications. Built with large gage, finely stranded 12AWG conductors, the construction of the SPKR1202 minimizes power loss through the cable yet offers exceptional flexibility and flex-life. The outer jacket is extruded from a TPE compound that is ultra-flexible, rugged and abrasion resistant. With a round overall construction, the SPKR1202 can be readily terminated to both 1/4" phone plugs and multi-pole speaker connectors such as Neutrik® Speak-On® types.